

### Products in Family


GRSX6275-13/2GB (1 x 2GB 1Rx4 DIMMs)  
 GRSX6275-813/2GB (1 x 2GB 2Rx8 DIMMs)  
 GRSX6275-13/4GB (1 x 4GB 2Rx4 DIMMs)  
 GRSX6275-13/8GB (1 x 8GB 2Rx4 DIMMs)



Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V $\pm$ 0.075 Fully RoHS Compliant Thermal Sensor	Each GRSX6275-13 upgrade consists of a single DDR3-1333 Registered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
GRSX6275-13/2GB GRSX6275-813/2GB GRSX6275-13/4GB GRSX6275-13/8GB	X4673A Not Offered by Sun X4674A Not Offered by Sun	Sun Blade X6275 Server Module


Front view

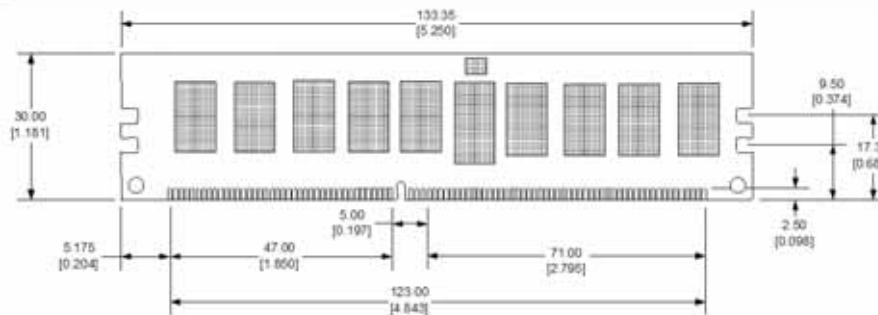

Back view



Side view



### Notes

Tolerances on all dimensions except where otherwise indicated are  $\pm$ .13 (.005).

All dimensions are expressed in millimeters [inches]